



NVENT CADDY MACROFIX INSULATED M8/M10



CERTIFICATIONS



FEATURES

Return-lip on the hanger prevents the rubber from detaching, eliminating rework during installation

Plastic washer prevents screws from falling out during installation

Combo head bolt works with slotted, hex, or Phillips drivers

Longer ears position the screw farther from the hanger, improving tool clearance when the screw is tightened

Combination nut can be attached to M8 or M10 threaded rod, simplifying material handling

Screw length has been optimized to accommodate an increased pipe range, reducing inventory-

Category II noise reduction according to DIN EN ISO 3822-1

Compliant for sound insulation design according to DIN 4109

Reaction-to-fire classification is "E" in compliance with DIN EN 13501-1

SPECIFICATIONS

Color:	Black
Finish:	Electrogalvanized
Material:	Steel;EPDM-SBR Rubber
Temperature:	-50 to 110 °C

Table 1/2

Catalog Number	Item Name	Outer Diameter(OD)	Pipe Size	NB/DN	Rod Size(RS)	Width(W)
MFD015	586001	11 – 15 mm	1/4"	8	M8, M10	20 mm
MFD019	586002	15 – 19 mm	3/8"	10	M8, M10	20 mm
MFD025	586003	19 – 25 mm	1/2"	15	M8, M10	20 mm
MFD031	586004	25 – 31 mm	3/4"	20	M8, M10	20 mm
MFD037	586005	31 – 37 mm	1"	25	M8, M10	20 mm
MFD044	586006	37 – 44 mm	1 1/4"	32	M8, M10	20 mm
MFD050	586007	44 – 50 mm	1 1/2"	40	M8, M10	20 mm
MFD058	586008	50 – 58 mm			M8, M10	20 mm
MFD068	586009	58 – 68 mm	2"	50	M8, M10	20 mm
MFD078	586010	68 – 78 mm	2 1/2"	65	M8, M10	23 mm
MFD088	586011	78 – 88 mm			M8, M10	23 mm
MFD098	586012	88 – 98 mm	3"	80	M8, M10	23 mm
MFD108	586013	98 – 108 mm	3 1/2"	90	M8, M10	23 mm
MFD118	586014	108 – 118 mm	4"	100	M8, M10	23 mm
MFD128	586015	118 – 128 mm			M8, M10	23 mm
MFD138	586016	128 – 138 mm			M8, M10	23 mm
MFD148	586017	138 – 148 mm	5"	125	M8, M10	25 mm
MFD160	586018	150 – 160 mm			M8, M10	25 mm
MFD170	586019	160 – 170 mm	6"	150	M8, M10	25 mm
MFD200	586020	190 – 200 mm			M8, M10	27 mm
MFD215	586021	205 – 215 mm			M8, M10	27 mm
MFD225	586022	215 – 225 mm	8"	200	M8, M10	27 mm
MFD250	586023	239 – 250 mm			M8, M10	30 mm
MFD275	586024	265 – 275 mm	10"	250	M8, M10	30 mm
MFD319	586025	309 – 319 mm			M8, M10	30 mm

Table 2/2


Catalog Number	Item Name	Thickness(T)	Screw Diameter(Sc)	Screw Length(L)	Static Load(F)
MFD015	586001	1 mm	M6	17 mm	1,000 N
MFD019	586002	1 mm	M6	17 mm	1,000 N
MFD025	586003	1 mm	M6	22 mm	1,000 N
MFD031	586004	1 mm	M6	22 mm	1,000 N
MFD037	586005	1 mm	M6	22 mm	1,000 N
MFD044	586006	1 mm	M6	27 mm	1,000 N
MFD050	586007	1.25 mm	M6	27 mm	1,500 N
MFD058	586008	1.25 mm	M6	27 mm	1,500 N
MFD068	586009	1.25 mm	M6	32 mm	1,500 N
MFD078	586010	1.50 mm	M6	32 mm	2,000 N
MFD088	586011	1.50 mm	M6	32 mm	2,000 N
MFD098	586012	1.75 mm	M6	37 mm	2,500 N
MFD108	586013	1.75 mm	M6	37 mm	2,500 N
MFD118	586014	1.75 mm	M6	37 mm	2,500 N
MFD128	586015	2 mm	M6	37 mm	3,000 N
MFD138	586016	2 mm	M6	37 mm	3,000 N
MFD148	586017	2 mm	M6	37 mm	3,200 N
MFD160	586018	2 mm	M6	37 mm	3,200 N
MFD170	586019	2 mm	M6	37 mm	3,200 N
MFD200	586020	2.25 mm	M6	37 mm	3,600 N
MFD215	586021	2.25 mm	M6	37 mm	3,600 N
MFD225	586022	2.25 mm	M6	37 mm	3,600 N
MFD250	586023	2.50 mm	M6	37 mm	4,000 N
MFD275	586024	2.50 mm	M6	37 mm	4,000 N

Catalog Number	Item Name	Thickness(T)	Screw Diameter(Sc)	Screw Length(L)	Static Load(F)
MFD319	586025	2.50 mm	M6	37 mm	4,000 N

ADDITIONAL PRODUCT DETAILS

Lining is EPDM rubber.

DIAGRAMS

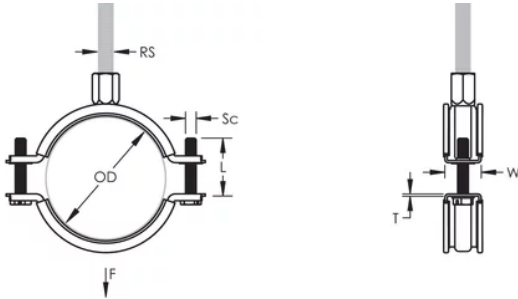

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe

Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF**
TRACER